

FIG. 1

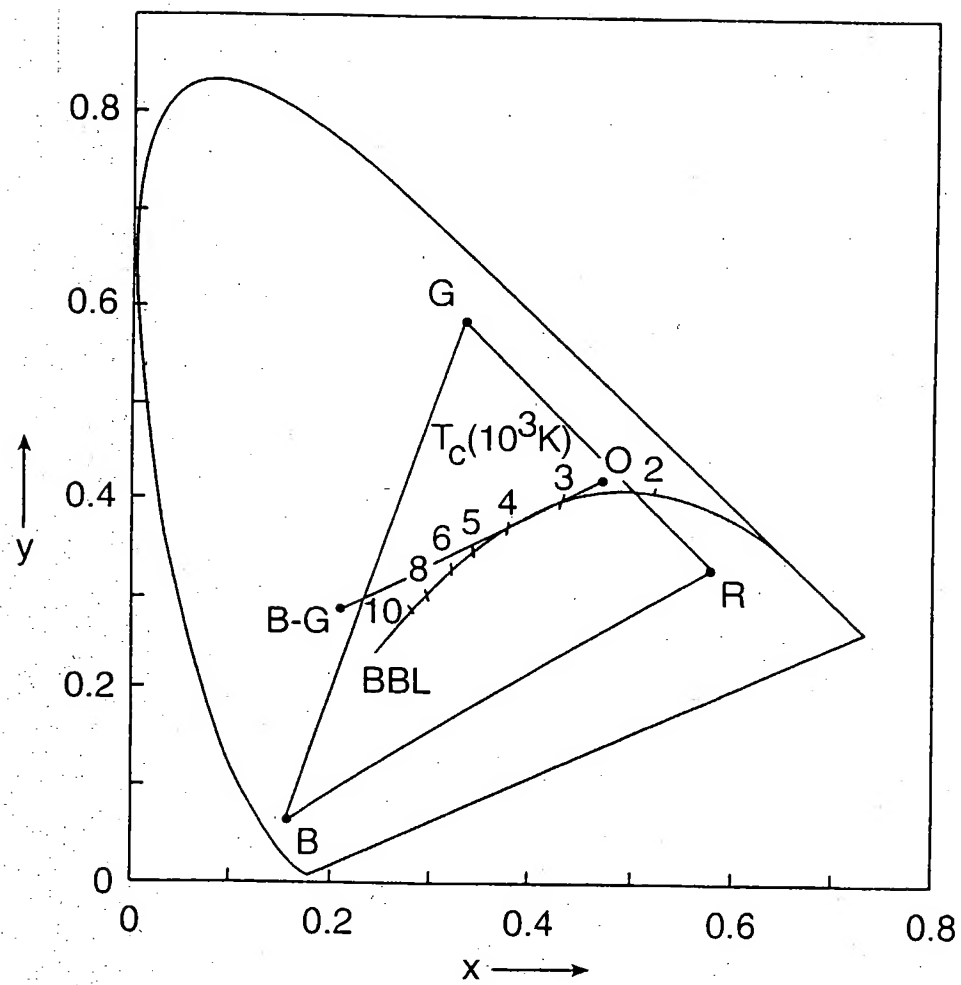


FIG. 2

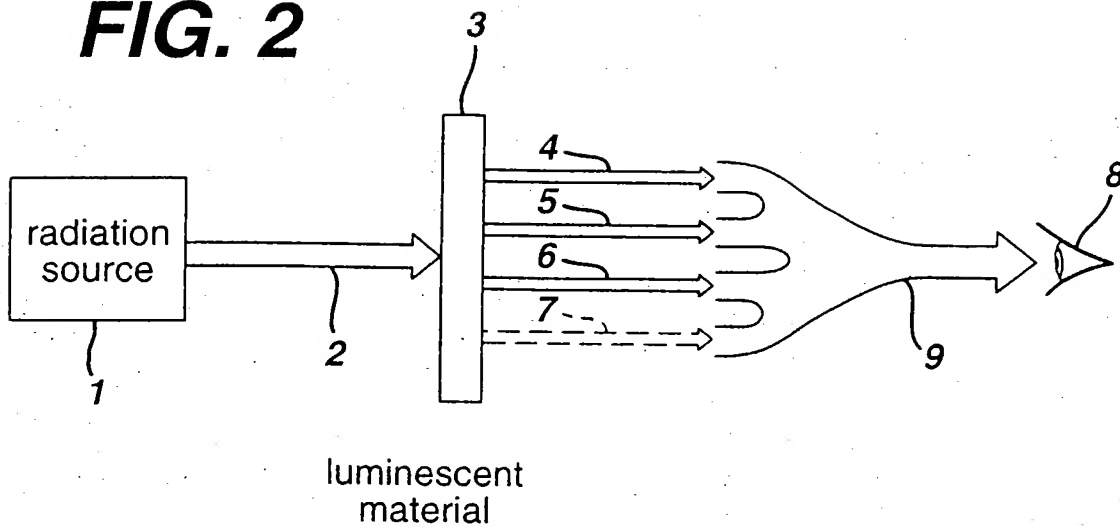


FIG. 3

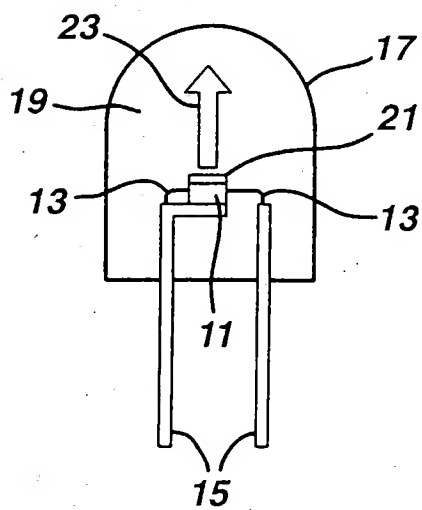


FIG. 4

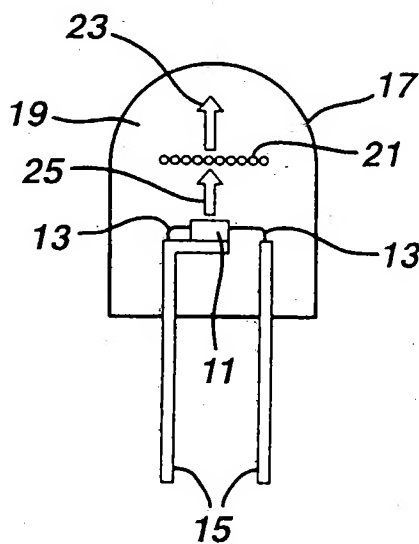


Fig. 1 is a perspective view of a cylindrical device 31. The device has a front flange 37 with two pins extending from its outer edge. A central nozzle 39 is surrounded by a spring 35. A textured band 33 is located near the nozzle.

A cross-sectional view of a container assembly. The assembly includes a lid (41) with a top layer (43) and a bottom layer (44). The lid is supported by two vertical side walls (47). The interior of the container is labeled 48. At the bottom of the container, there is a base (42) with a central recessed area (46) containing a component (45). The component (45) is shown in cross-section with diagonal hatching.